

SIGMA Control


HAND-HELD FIRMWARE UPDATE PROCEDURE

Making sure the firmware is up to date on the SIGMA Hand-held is important to maximise dynamometer testing capabilities and to ensure correct operation. To obtain the upgrade files please visit www.fromentdynamometers.com/firmware


WARNING!

Froment dynamometers are designed with safety as a very high priority, but their operation does present some risks. Tractor PTO shafts can be particularly hazardous and you should not use this equipment unless you have read and understood the manual. The manual is included with the dynamometer on purchase or is available at www.fromentdynamometers.com/dynamometer-manuals


1. Add upgrade 'sig' file to a USB flash drive. Ensure no other files with 'sig' extension or named 'handheld' exist on the USB flash drive. The latest firmware can be downloaded from www.fromentdynamometers.com/firmware

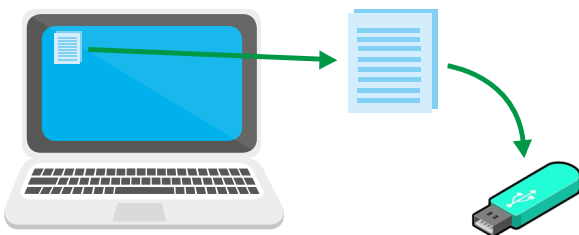

2. Connect USB drive to micro USB connector using a female USB A to male micro USB adapter.

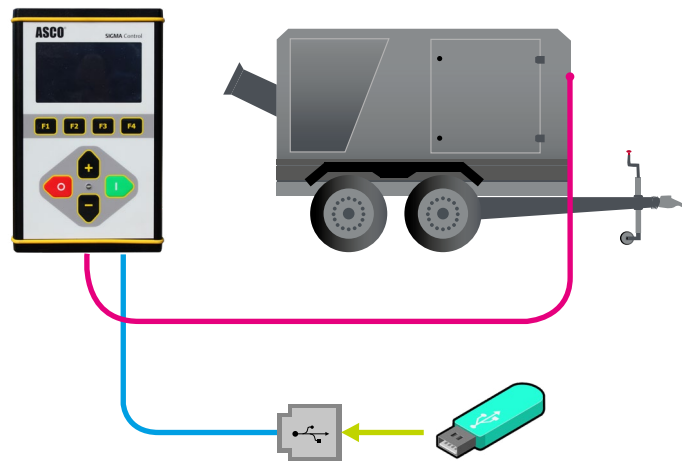

3. Connect Sigma Hand-held to the dynamometer.

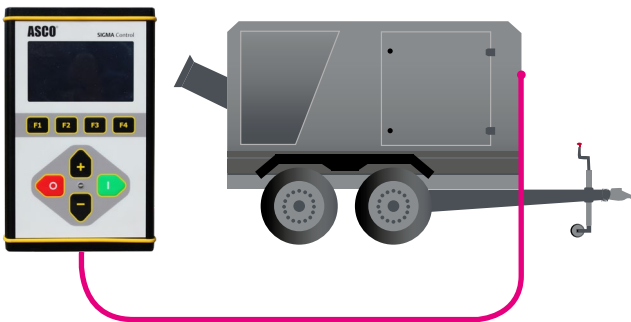

4. Power on hand-held and check bootloader has been entered. Press F1 to update. The current firmware version will be updated once complete.



5. Remove USB adapter and press F4 to finish.

